


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F16D 66/02	A1	(11) International Publication Number: WO 96/41970 (43) International Publication Date: 27 December 1996 (27.12.96)
(21) International Application Number: PCT/SE96/00686 (22) International Filing Date: 29 May 1996 (29.05.96) (30) Priority Data: 9502094-7 8 June 1995 (08.06.95) SE (71) Applicant (for all designated States except US): HALDEX AB [SE/SE]; P.O. Box 501, S-261 24 Landskrona (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): EKEROTH, Mats [SE/SE]; Törnrosgården 9, S-261 71 Landskrona (SE). (74) Agents: STRÖM, Tore et al.; Ström & Gulliksson AB, P.O. Box 4188, S-203 13 Malmö (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: A BRAKE LINING WEAR INDICATING DEVICE**(57) Abstract**

An automatic brake lever (1) with a built-in slack adjuster is intended for transmitting brake force from a brake cylinder and is mounted on a brake actuating cam shaft (2). For the purpose of accomplishing a wear indicating device, a coded disc (10) is connected to the cam shaft, whereas a housing (9, 11) therefore is connected to the brake lever or a fix-point for the lever. The coded disc is provided with a number of coded paths of circular shape, magnetic areas of equal length being provided in each coded path. A number of hall-elements (15) corresponding to the number of coded paths are provided in the cover (11) of the housing, each hall-element being arranged to sense the magnetic areas in the respective coded path. The signals from the hall-elements together indicate the relative position between the disc and the cover.

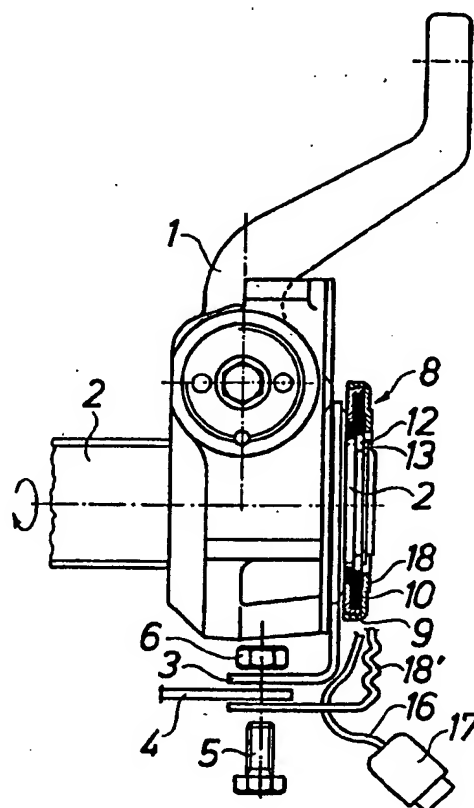

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

A BRAKE LINING WEAR INDICATING DEVICE

5

Technical Field

This invention relates to a device for indicating wear of brake linings in a vehicle brake, preferably actuated via an automatic brake lever with a built-in brake
10 adjuster, the lever being intended for transmitting brake force from a brake cylinder and being mounted on a brake actuating cam shaft. The device may also be used for indicating the stroke of a brake cylinder push rod connected to the brake lever. Although the device is stated
15 to be used with a brake lever, other similar uses are possible within the scope of the invention.

Background of the Invention

Many devices for the above purpose are known, ranging from simple mechanical devices to rather complicated
20 electrical or electronic devices. A good example of the latter category is the device shown in US-A-5 253 735, which is regarded as the closest prior art. Here, three discs, which are rotatable relative to each other and are arranged on the cam shaft adjacent the brake lever, are
25 provided with magnets and hall-elements in a certain arrangement for supplying certain information about the condition of the brake.

The basic function of a device as defined is to supply information about the wear of the brake linings, so
30 that they can be replaced in time, and accordingly the name wear sensor may be used. However, a wear sensor properly designed and installed can also supply useful information about the piston stroke of the brake cylinder used and about the overall function of the brakes on the vehicle.

35 It is of great importance that a wear sensor is sturdy and can resist the extremely harsh environmental

conditions under the vehicle. The sensor shall also have small dimensions due to the often very limited available space. The information provided from the sensor shall be as accurate as possible and shall be compatible with other
5 information available in modern vehicles, where computers and other electronic equipment are used to an increasingly large extent.

The Invention

A wear sensor fulfilling the above and other
10 requirements is according to the invention obtained in that a coded disc, on its surface being divided into a number of equally large circle sectors, has at least one coded path, shaped as a circle segment, with equally long magnetic areas in each sector, the magnetic areas being of different
15 lengths in different coded paths, and that a hall-element is provided in a part adjacent the coded disc for sensing each coded path, the coded disc and said part being rotationally arranged in relation to each other.

The coded disc is preferably connected to the cam
20 shaft, whereas the hall-elements are arranged in a cover of a housing for the device.

In a practical and preferred embodiment the coded disc has three sectors each with an angle of 120° , which in principle will be the maximal operating range of the wear
25 sensor; two of these sectors have two coded paths each, whereas the third sector has three coded paths, and the number of hall-elements is seven.

In this way the accuracy of the device will be 1° , which is regarded as very good.

30 If only information about the wear condition is required, the wear sensor housing is connected to the brake lever, which gives a simple device with comparatively few variants.

If also information about the brake cylinder piston stroke and the brake function is desired, the housing shall be connected to a fixed part in the vehicle underframe.

Electronic circuitry for transforming the signals
5 from the hall-elements into an analog or digital output signal suitable for further processing in the vehicle is mounted in the cover.

The total thickness of the device (coded disc and housing with hall-elements as well as electronic circuitry)
10 may be as small as 10 mm, which in many instances is the only available space for the sensor.

Brief Description of the Drawings

The invention will be described in further detail below, reference being made to the accompanying drawings,
15 in which Fig 1 is a side view, partly in section, of an automatic brake lever with a first embodiment of a device or a wear sensor according to the invention, Fig 2 is a front view from the right in Fig 1 of a coded disc in the sensor, Fig 3 is a front view from the left of a cover for
20 the sensor, Fig 4 is a side view, partly in section, of an automatic brake lever with a second embodiment of a wear sensor according to the invention, Fig 5 is a front view from the right in Fig 4 of a coded disc in this sensor, and Fig 6 is a front view from the left of a cover for the
25 sensor.

Detailed Description of Preferred Embodiments

An automatic brake lever 1, shown in Figs 1 and 4, is well known in the art. It has a built-in brake adjuster and is mounted on a splined S-cam shaft 2. In a way not
30 illustrated in Figs 1 and 4 this shaft 2 is provided at its other end with an S-cam, which when turned brakingly presses brake linings on brake shoes against a brake drum. With its upper end in Figs 1 and 4 the brake lever 1 is connected with a push rod of a preferably pneumatic brake
35 cylinder, which is attached to a vehicle underframe.

This S-cam brake arrangement is common on heavy road vehicles, such as trucks and buses.

The purpose of the brake adjuster built-into the brake lever 1 is to keep the slack between each brake lining and the brake drum constant irrespective of the wear
5 of the brake lining. It so does by gradually turning or rotating the cam shaft 2 in relation to the brake lever 1. The total rotation of the cam shaft 2, when the brake linings are worn out, is in the order of 90-100°.

10 For performing its intended function an automatic brake lever 1 needs a reference point or fix-point. In the shown case this is realized by means of a control arm 3, which is rotatable in relation to the brake lever 1 and is connected to a fixed arm 4, attached to the vehicle
15 underframe, by means of a screw 5 and a nut 6.

In order primarily to obtain an indication of the wear of the brake linings but also of the stroke of the push rod connecting the brake lever 1 to the brake cylinder a sensor 7 (Fig 1) or 8 (Fig 4) is arranged at the brake
20 lever 1 in a way now to be further described.

A sensor 7 as shown in Fig 1 consists of three parts: a base ring 9, a coded disc 10 (Fig 2), and a cover 11 (Fig 3).

The coded disc 10 is rotatable in relation to its
25 housing, which is formed of the base ring 9 and cover 11 snapped together to a unit. The inner periphery 10' of the coded disc 10 is designed to fit on the splines of the S-cam shaft 2 so as to be rotatable therewith, when the sensor 7 is mounted on the end of the shaft 2 extending out
30 from the brake lever 1 and suitably held in position, such as by a washer 12 and a locking ring 13. In the embodiment according to Fig 1 the sensor housing 9, 11 is connected to the brake lever 1, as illustrated at 14. For this purpose the cover 11 is provided with a lug 11'.

The coded disc 10 is provided with a pattern of magnetic areas to be described and may be made of polyamide with magnetic material, whereas the cover 11 is provided with a number of hall-elements 15 for sensing the magnetic areas.

It has already been mentioned that the total rotation of the brake lever 1, until the brake linings are worn-out, is in the region of 90-100°. Added to this is a further rotation corresponding to the maximum push rod stroke of some 30°. The sensor 7 shall accordingly have the capacity to emit signals for rotation in the range of 0-120°.

This capacity is obtained in that the surface of the coded disc 10 is divided into three sectors with an angle of 120° each. (Deviations from the exact value 120° are possible.) In two of these sectors there are two coded paths in the shape of segments of a circle and in the third sector three such coded paths. Each such coded path comprises a number of consecutive magnetic south-poles and north-poles, illustrated in Fig 2 as white and hatched areas, respectively. The lengths of the magnetic areas differ between the coded paths, but within a certain coded path the south-poles and north-poles have the same length.

Each hall-element 15 in the cover 11 is intended to sense the presence of a south-pole or a north-pole in a certain coded path. Accordingly, the number of hall-elements 15 in the cover 11 is seven in groups of two, two, and three, respectively.

At a relative rotation between the coded disc 10 and the cover 11, where the arrangement of the magnetic areas and the hall-elements is as described above, it can be demonstrated that the combination of the signals from the seven hall-elements 15 will provide an accuracy of 1°.

In the following table the angle range 30-40° has been randomly chosen to demonstrate that each degree

corresponds to a certain combination of signals (1=north-pole, 0=south-pole) from the seven hall-elements 15:

		Hall-element no						
		1	2	3	4	5	6	7
5	30°	1	0	0	0	1	0	0
	31°	0	0	0	0	1	0	0
	32°	0	0	0	0	1	1	0
	33°	1	0	0	0	1	1	0
	34°	1	1	0	0	1	1	0
10	35°	0	1	0	0	1	1	0
	36°	0	1	1	0	1	1	0
	37°	1	1	1	0	1	1	0
	38°	1	0	1	0	1	1	0
	39°	0	0	1	0	1	1	0
15	40°	0	0	1	1	1	1	0

20 Electronic circuits necessary for transforming the
different signals from the hall-elements 15 into an analog
or a digital output signal are also mounted in the cover
11. A cable 16 with a contact 17 is connected to the lug
11' for transmitting the output signal and an input voltage
25 for the sensor.

 In order to minimize the instantaneous current
consumption during operation, the electronic circuitry is
preferably arranged to make a sequential reading of the
hall-elements. A normal hall-element has a rating of 5 mA,
30 which for seven hall-elements operated concurrently means a
total consumption of 35 mA (plus the consumption for the
electronic circuitry). According to the invention the
electronic circuitry is designed to operate the different
hall-elements in sequence one at a time with a time
35 interval in terms of milliseconds, which means that the

instantaneous current consumption for the indicating device will only be 5 mA (plus the demand from the electronic circuitry) but still that the combined reading from the seven hall-elements will not suffer.

5 A slightly modified embodiment is shown in Figs 4-6. With the exception of the cover for the sensor 8, all parts are the same as in the earlier embodiment and accordingly have the same numerals. The cover here bears the numeral 18. This cover 18 has a lug 18', which is connected to the
10 fixed arm 4, to which also the control arm 3 of the brake lever 1 is connected. The cover 18 is provided with hall-elements 15 in the same way as the cover 11.

 In the first embodiment according to Figs 1-3, which is simple and gives comparatively few installation
15 variants, the sensor housing 9, 11 is connected to the brake lever 1 and thus is rotatable therewith, whereas the coded disc 10 is attached to the cam shaft 2 and is rotatable therewith. The signal provided through the cable 16 and the contact 17 is indicative for the relative
20 rotational movement between the brake lever 1 and the cam shaft 2 and can accordingly only give information about the brake lining wear; this information, however, is basic for the device.

 Further information can be derived from the
25 embodiment according to Figs 4-6, where the sensor housing 9, 11 is connected to the fixed arm 4, attached to the vehicle underframe. Accordingly, this embodiment will give information about all the angular or rotational movements of the cam shaft 2.

30 Hereby, the following information in three areas may be derived:

 1. Lining wear information: By knowing the angle-value at new brake linings it is easy to define the angle for worn-out linings.

2. Piston stroke information: By knowing the angle value for a fully released brake it is easy to compare this angle to the angle for an applied brake.

3. Brake function: By comparing the information from
5 the different sensors at all the wheels of the vehicle it is easy to detect whether one brake is not properly functioning, for example if the brake air is disconnected or if the S-cam shaft is broken etc.

In the preferred embodiments the number of circle
10 sectors is three and the number of coded paths and hall-elements seven, which with the described design gives an accuracy of 1°. However, designs with different numbers are possible and will provide different accuracies: lower numbers - lower accuracy and higher number - higher
15 accuracy.

CLAIMS

1. A device for indicating wear of brake linings in a vehicle brake, preferably actuated via an automatic brake lever (1) with a built-in brake adjuster, the lever being intended for transmitting brake force from a brake cylinder and being mounted on a brake actuating cam shaft (2), characterized in that a coded disc (10), on its surface being divided into a number of equally large circle sectors, has at least one coded path, shaped as a circle segment, with equally long magnetic areas in each sector, the magnetic areas being of different lengths in the different coded paths, and that a hall-element (15) is provided in a part (11) adjacent the coded disc for sensing each coded path, the coded disc (10) and said part (11) being rotationally arranged in relation to each other.

2. A device according to claim 1, characterized in that the coded disc (10) is connected to the cam shaft (2) and that the hall-elements (15) are arranged in a cover (11) of a housing (9, 11) for the device.

3. A device according to claim 1, characterized in that the coded disc (10) has three circle sectors each with an angle of 120°, that two sectors have two coded paths each and one sector has three coded paths, and that the number of hall-elements (15) is seven.

4. A device according to claim 2, characterized in that the housing (9, 11) is connected to the brake lever (1) (Fig 1).

5. A device according to claim 2, characterized in that the housing (9, 11) is connected to a fixed part (4) in the vehicle underframe (Fig 4).

6. A device according to claim 2, characterized in that electronic circuitry for transforming the signals from the hall-elements (15) into an analog or digital output signal is mounted in the cover (11).

7. A device according to claim 6, characterized in that the electronic circuitry operates the different hall-elements (15) sequentially in order to minimize instantaneous current consumption.

1/3

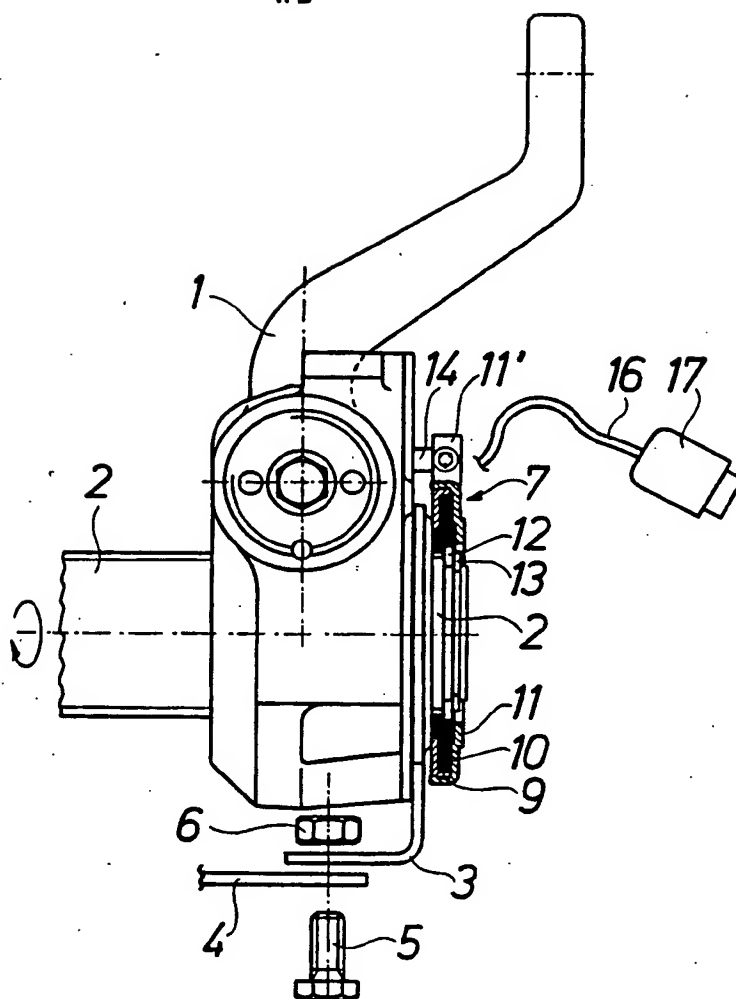


FIG. 1

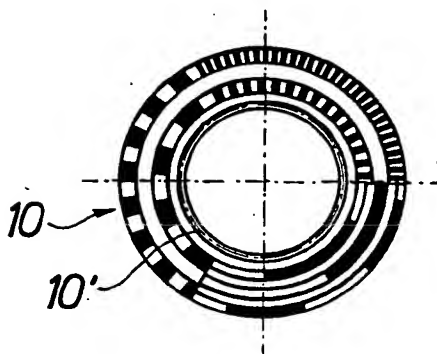


FIG. 2

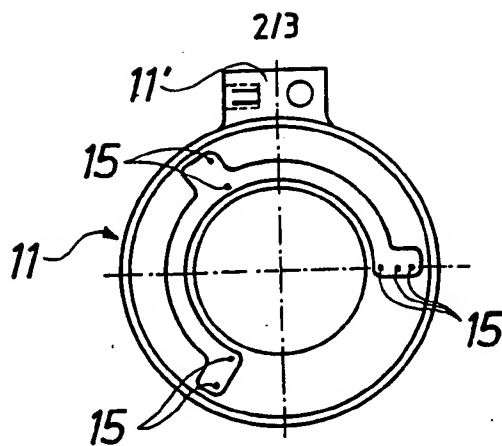


FIG. 3

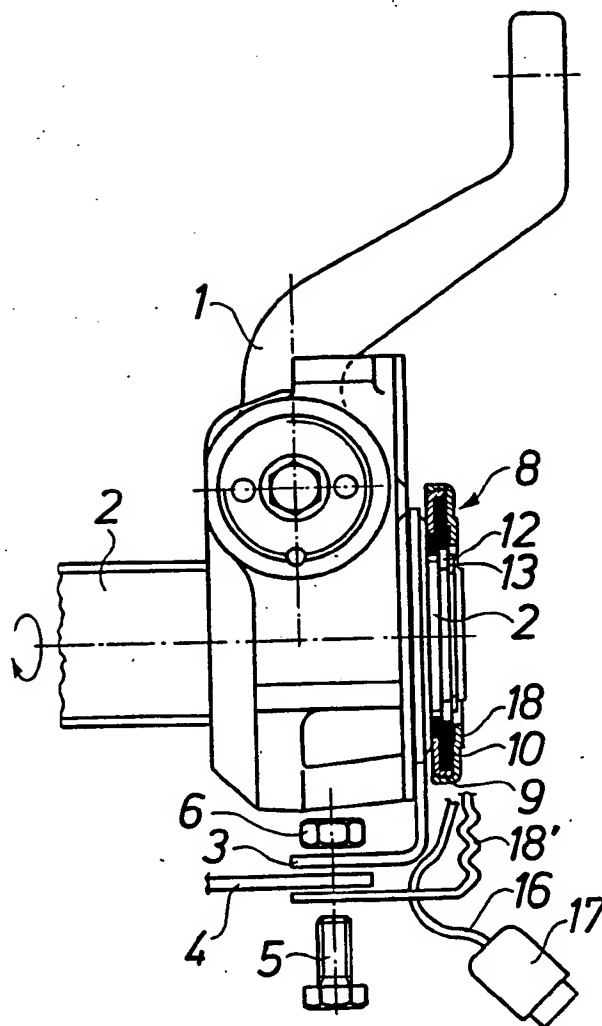


FIG. 4

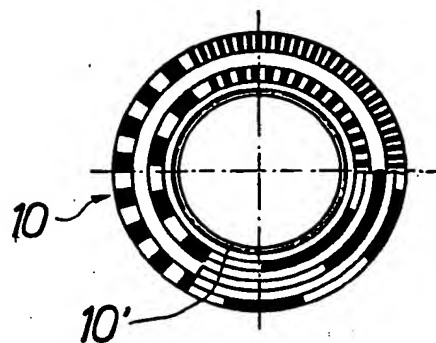


FIG. 5

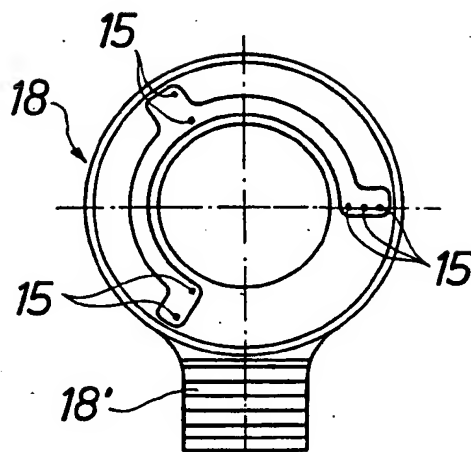


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 96/00686

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: F16D 66/02 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: F16D, B60T		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 3010498 A1 (WABCO FAHRZEUGBREMSSEN GMBH), 24 Sept 1981 (24.09.81) --	1-7
A	EP 0460378 A2 (WABCO WESTINGHOUSE FAHRZEUGBREMSSEN GMBH), 11 December 1991 (11.12.91) --	1-7
A	US 3776329 A (HOPE ET AL), 4 December 1973 (04.12.73) --	1-7
A	US 5253735 A (LARSON ET AL), 19 October 1993 (19.10.93) --	1-7
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
11 Sept 1996		17 -09- 1996
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Tycho Beckman Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 96/00686

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5307013 A (SANTOS ET AL), 26 April 1994 (26.04.94) --	1-7
A	US 5313159 A (ALLWINE JR), 17 May 1994 (17.05.94) -- -----	1-7

INTERNATIONAL SEARCH REPORT
Information on patent family members

31/07/96

International application No.
PCT/SE 96/00686

Patent document cited in search report	Publication date.	Patent family member(s)	Publication date
DE-A1- 3010498	24/09/81	DE-A- 3032515	22/04/82
EP-A2- 0460378	11/12/91	SE-T3- 0460378	
		AT-T- 112731	15/10/94
		DE-A- 4017951	12/12/91
		DE-D- 59103203	00/00/00
		ES-T- 2061100	01/12/94
US-A- 3776329	04/12/73	NONE	
US-A- 5253735	19/10/93	NONE	
US-A- 5307013	26/04/94	AU-B- 659151	11/05/95
		AU-A- 1689392	02/11/92
		BR-A- 9205826	11/10/94
		CN-A- 1065524	21/10/92
		DE-T- 4290856	17/02/94
		JP-T- 6510836	01/12/94
		WO-A- 9217719	15/10/92
US-A- 5313159	17/05/94	CA-A- 2120764	13/05/93
		EP-A- 0614571	14/09/94
		JP-T- 7507420	10/08/95
		US-A- 5218251	08/06/93
		US-A- 5258735	02/11/93
		US-A- 5369323	29/11/94
		US-A- 5440185	08/08/95
		WO-A- 9309550	13/05/93